



EDGE® Hydraulic Torque Wrench

For general maintenance that requires high torque values and repeatable results, the EDGE is HYTORC's workhorse. The straightforward three-moving-part design was created by HYTORC over 30 years ago and has been consistently improved upon, resulting in the most tried and tested line of hydraulic torque wrenches in the world.

SIMPLE OPERATION AND MULTI-AXIS SWIVEL




The three-moving part design of the EDGE reduces the number of potential repairs and keeps operating costs to a minimum. The multi-axis swivel is used on all HYTORC hydraulic torque wrenches (with the exception of the ICE) for maximum positioning, flexibility, and safety.

REMOVABLE SPLINED SQUARE DRIVE



For quick and simple directional changes and maximum durability, the EDGE splined square drive can be removed and installed on the opposite side with no tools.

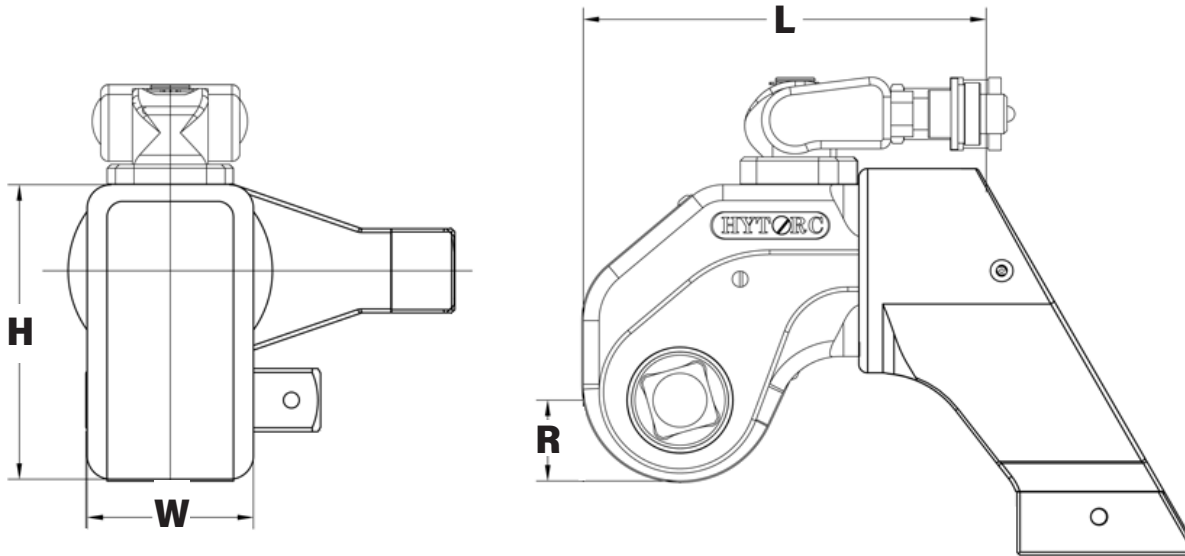

LEGEND: H = HEIGHT W = WIDTH L = LENGTH R = RADIUS

MODEL NUMBER	H	W	L	R	DRIVE	WEIGHT	TORQUE	
	IMPERIAL (in.)					lbs.	MIN (ft.-lbs.)	MAX (ft.-lbs.)
EDGE - .5S	2.95	1.64	4.01	0.82	0.75	3.30	106	710
EDGE - 1S	3.53	1.97	4.94	0.97	0.75	4.05	178	1,257
EDGE - 3S	4.71	2.63	6.4	1.31	1.00	8.50	443	3,079
EDGE - 6S	6.04	3.18	7.61	1.57	1.50	19.20	893	6,241
EDGE - 9S	6.57	3.57	8.69	1.86	1.50	20.05	1,230	8,555
EDGE - 11S	7.07	3.95	9.60	1.96	1.50	25.00	1,615	11,291
EDGE - 30S	10.10	5.64	13.71	2.79	2.50	64.70	4,448	29,650

MODEL NUMBER	METRIC (mm)					kg	MIN (Nm)	MAX (Nm)
	EDGE - .5S	75	42	102	21	19	1.50	144
EDGE - 1S	90	50	125	25	19	1.83	241	1,704
EDGE - 3S	120	67	163	33	25	3.90	601	4,175
EDGE - 6S	153	81	193	40	38	8.70	1,211	8,462
EDGE - 9S	167	91	221	47	38	9.09	1,668	11,599
EDGE - 11S	180	100	244	50	38	11.33	2,190	15,309
EDGE - 30S	257	143	348	71	64	29.34	6,031	40,200

The World's Most Trusted Industrial Bolting Systems



Headquarters:
333 Route 17 N., Mahwah, NJ 07430
+1-201-512-9500

Email:
info@hytorc.com

Phone:
1-800-FOR-HYTORC

Online:
hytorc.com